


fuma // OUTDOOR – TERRACE / BALCONY PEDESTAL BEARING

Fixed

FST 60-Modules are suitable to create raised floors from tiles and pavers. In compliance with this type of flooring can be used with natural stone, ceramic and composite materials.

// PRODUCT FEATURES

Raw Material	Polypropylene
Installation height	min. 32 mm – max. 110 mm
Maximum extension	2 – 3 pieces Extensions allow for flexible bridging of greater installation heights. When using more than 2 – 3 extensions and an installation height exceeding 30 cm, ensure that a pedestal support is placed every 40 cm to maintain stability. Additionally, a central pedestal support should be positioned under each slab for added support.
Base Diameter	187 mm
Base Wall Thickness	3 mm
Head Diameter	116 mm
Laying Surface of the Base	302 cm²
Tab Thickness	3 mm (removable)
Tab Height	10 mm
Slope Correction	% 0
Environmental Impact Assessment	Eco - Friendly
Application Areas	Can be used for all indoor and outdoor areas. Also, on levelled surfaces, epoxy or membrane insulated in areas.
Application	Using any of fixing material is not necessary. Optionally, the modules can be fixed to the application surface using adhesive or screw.

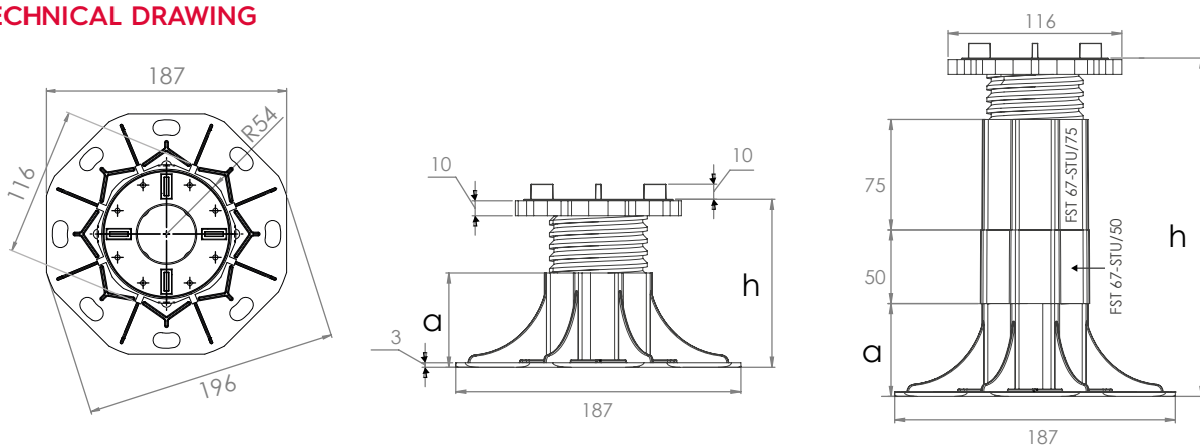
// TECHNICAL DRAWING

// DIMENSION & WEIGHT

Model	FST 60-01/30-F	FST 60-02/40-F	FST 60-03/55-F	FST 60-04/75-F	Height examples					
a	18 mm	27 mm	40 mm	62 mm	FST 60-03/55-F	FST 60-04/75-F	FST 60-04/75-F	FST 60-04/75-F	FST 60-04/75-F	FST 60-04/75-F
h (min. - max)	32-38 mm	38-50 mm	50-75 mm	73-110 mm	102-130 mm	126-155 mm	147-184 mm	175-205 mm	200-225 mm	220-250 mm
Extension	-	-	-	-	FST 67-STU/50	FST 67-STU/50	FST 67-STU/75	FST 67-STU/50	FST 67-STU/50 FST 67-STU/75	FST 67-STU/75
Weight	0,213 kg	0,234 kg	0,262 kg	0,293 kg	-	-	-	-	-	-
Comp.										

To increase the height kindly use the additional available extension FST 67-STU/50 and / or FST 67-STU/75.


// RAW MATERIAL INFORMATION

Carrier	Polypropylene
Product Code	240 KTPH
Product Colour	Black
Filler	Calcium Carbonate (CaCO ₃)






// NOTES ON INSTALLATION

- For tile sizes of 60 x 60 cm and above, we recommend placing an additional pedestal bearing at the center of each tile.
- For tile sizes of 80 x 80 cm and above, a central pedestal bearing is mandatory.

// PRESSURE RESISTANCE



Pressure measuring point

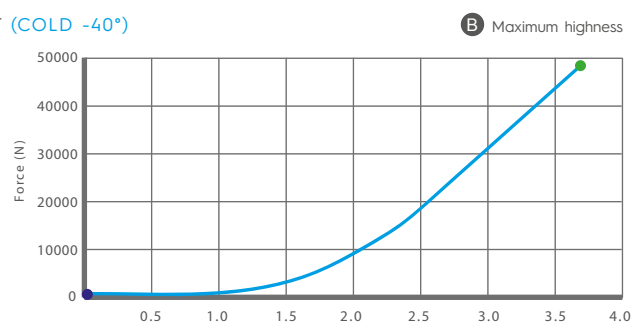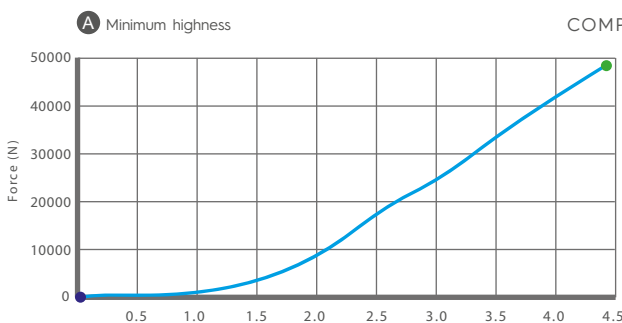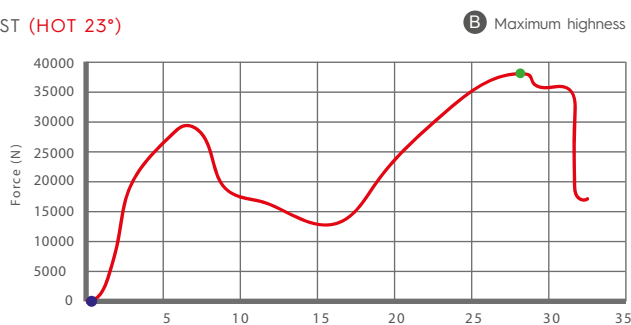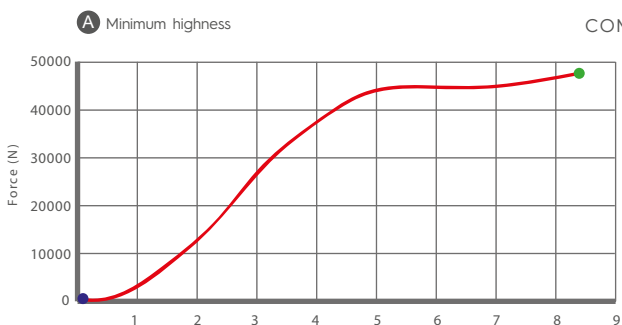

// PACKAGING INFORMATION

Product Code	FST 60-01/30-F	FST 60-02/40-F	FST 60-03/55-F	FST 60-04/75-F	FST 67-STU/50	FST 67-STU/75
Pcs per box	80*	70*	50*	40*	60**	40**
Gross weight per box	18,270 kg	17,610 kg	14,330 kg	12,950 kg	6,920 kg	5,520 kg
Boxes per pallet	12	12	12	12	48	48
Box dimensions	*cm 60 x 40 x h40			**cm 40 x 30 x h20		
Gross weight per pallet	230,410 kg	222,490 kg	183,130 kg	166,570 kg	343,330 kg	276,130 kg
Pallet dimensions	cm 80 x 120 x h140					

* Products are packed in cardboard boxes. Shrink-wrapped euro-pallets are used for final packaging. In spite of being shrink-wrapped and rain proof packagings, recommended to keep the pallets in closed area.