


Innen- und Außenecke FABI/FABA

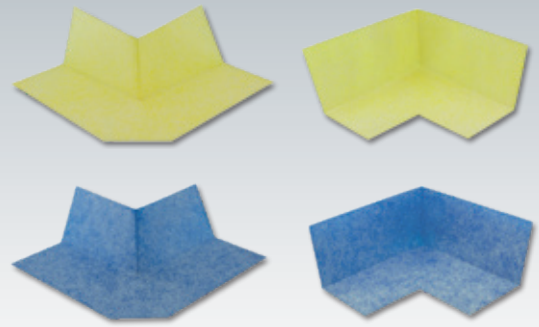

Innen- und Außenecke

	Artikel	Farbe	VPE pro Karton
Innenecke	FABI 050-G	gelb	25 Stück
Außenecke	FABA 050-G	gelb	25 Stück
Innenecke	FABI 050-B	blau	25 Stück
Außenecke	FABA 050-B	blau	25 Stück

Description	Special coated outside corner made from 3-ply tape.
Material composition	Substrate: Two outer layers of polypropylene non-woven Coating / membrane: one inner layer of polyethylene waterproofing membrane
Application	Sealing for construction corners in addition with waterproofing tapes
Colour	Grey (Other colours in accordance to RAL upon request)
Side length (approx.)	105 mm x 105 mm
Total thickness (approx.)	0,5 mm
Material weight (approx.)	8,8 g/piece
Resistance to temperature min./max.	-30 °C / +90 °C

Physical Properties (approx.)	DIN	Value
Burst pressure max.	Internal	> 1,5 bar
Resistance to water pressure	DIN EN 1928 (Version B)	> 1,5 bar

Chemical Properties	Resistance after storage over 7 days by room temperature in following chemicals	+ = resistant 0 = weakened - = non resistant
Hydrochloric acid 3%	Internal	+
Sulphuric acid 35%	Internal	+
Citric acid 100 g/l	Internal	+
Lactic acid 5%	Internal	+
Potassium hydroxide 3% / 20%	Internal	+/+
Sodium hypochlorite 0,3 g/l	Internal	+
Salt water (20g/l Sea water salt)	Internal	+

Attention: Due to technical reasons the colour of the material or the printing may vary slightly from batch to batch.

Storage: Cool and dry, protect against sunlight, use within 24 month after receipt.

The above technical data represent average values. The technical information and application instructions are based on our experience and present knowledge. However, it is each users own responsibility to make trials with the original substrates in order to verify the suitability of our products for the intended purpose, taking into consideration all application related parameters. Please contact us if you have any further questions.

Hinweis:

Die korrekte Anwendung unserer Produkte unterliegt nicht unserer Kontrolle. Eine Gewährleistung kann deshalb nur für die Güte unserer Erzeugnisse im Rahmen unserer Verkaufs- und Lieferbedingungen, nicht aber für die erfolgreiche Verarbeitung übernommen werden. Änderungen behalten wir uns vor. Angaben, die über den Inhalt dieses Datenblattes hinausgehen, bedürfen der schriftlichen Bestätigung.

Weitere Informationen im jeweils aktuell gültigen Gesamtkatalog.

Stand: 01/2019